

Multiload 37 **PRO**



Battery Charger | 37.5/18.75 A | 500 W | 12/24 V


Electrical Specifications

AC Input voltage	90 to 286 V
Frequency	30 to 70 Hz
Nominal input current at rated output	< 9A
Output Nominal voltage	12 / 24 V (manual selection)
Output Current	37.5A (12V) 18.75A (24V)
Rated output current	Manual selection
Rated output (Watt)	500W
Load regulation	1.5%
Compatible batteries	35 to 150 Ah
Compatible battery types	Wet, AGM, Gel, SLA, LiFePO ₄
Charging voltage	4 charging voltages available for manual selection
Parallel outputs	Maximum of two devices connected in parallel
Efficiency	80%

Mechanical Specifications

Dimensions (L×W×H)	261 × 160 × 70 mm
Weight	1.8 kg
Operating temperature	-10 to 40 °C
Storage temperature	-20 to 80 °C

Dimensions

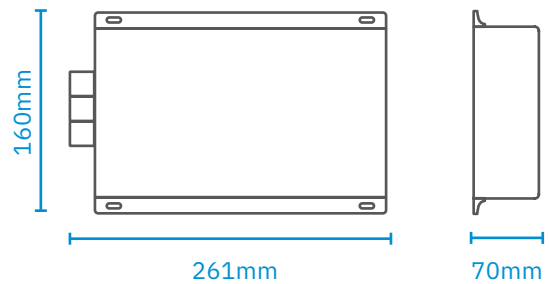

Series and Parallel Connection

